




Smart Wi-Fi Video Doorbell

Ultra Low Power Consumption

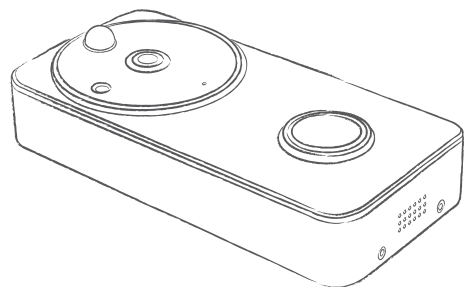


- ◆ Thanks for purchasing and using our product. Please read this quick start guide before using, and keep it for future reference.
- ◆ Menu contents are subject to change without notice in accordance with our policy of continuous product improvement.

Packing List

Please consult below checklist for all the components.




Bracket

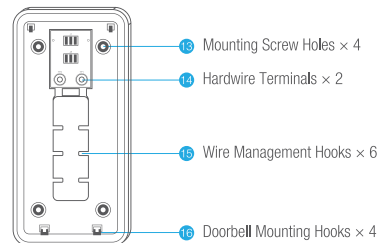

Power Supply Solution


● Hardwire Power Source



Notice:

- Bell transformer is not included.
- Please operate under the direction of the professional.

● Powered By Battery



Warning:

- Please note the battery electrodes! Insert the 2 batteries with positive sides upwards.
- Inappropriate battery install can damage device and may cause fire!

Connect Device

Make sure your smartphone is connected to a 2.4GHz Wi-Fi network, so as to configure the video doorbell (The device does not support 5GHz Wi-Fi network).


Search and download the APP "Connect SmartHome" from APP Store or Google Play. The APP is also available by scanning below Q-R code with your smartphone.



APP Guide - User Register


Run the APP on your smart phone, and register an A/C with your E-mail ID or your phone number.

- 1 Tap on "Register"
- 2 Input Email or Phone No.
- 3 Set up password

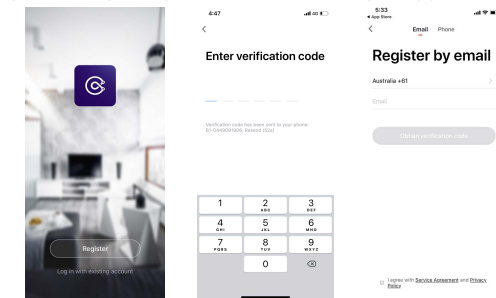


Configuration Steps



Detailed in-app configuration steps are as below:

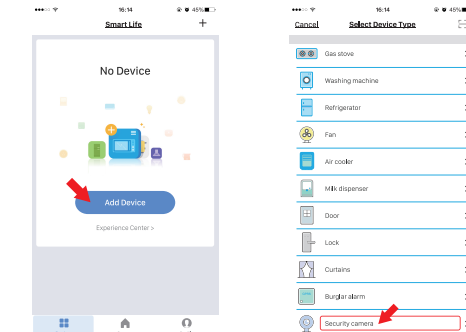


- 1 Tap to add device
- 2 Select device type

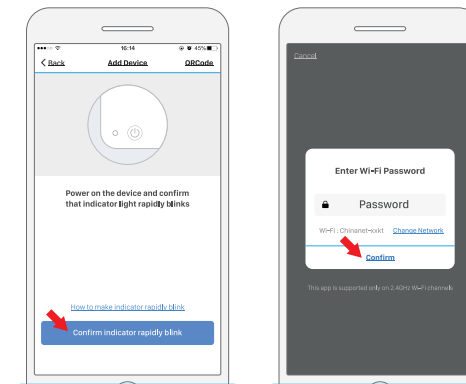


- 3 Check indicator status
- 4 Check the Wi-Fi password

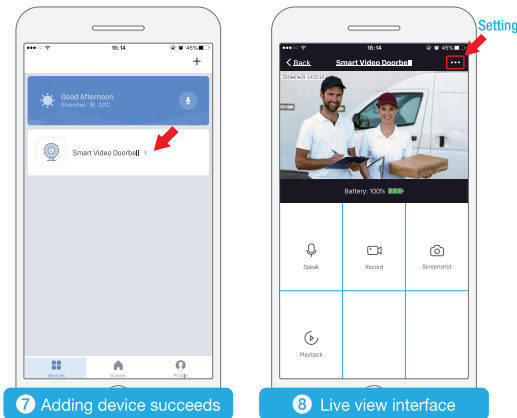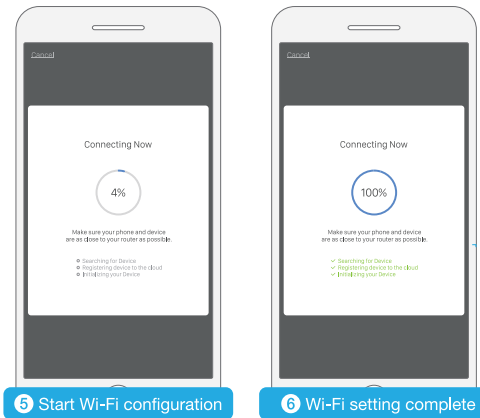

Notification Push

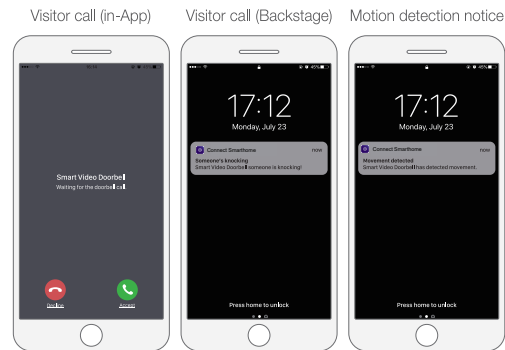


Device Sharing

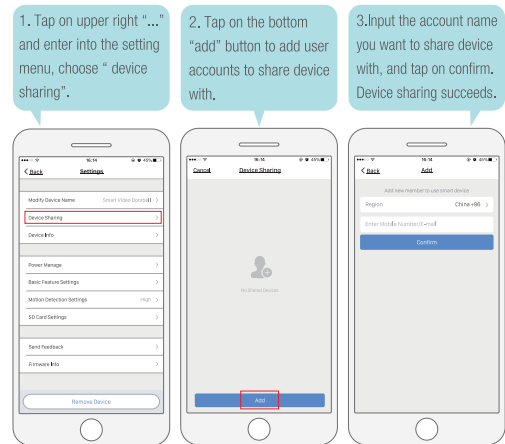


Installation

- 1 Positioning the mounting bracket.
- 2 Install the mounting bracket.

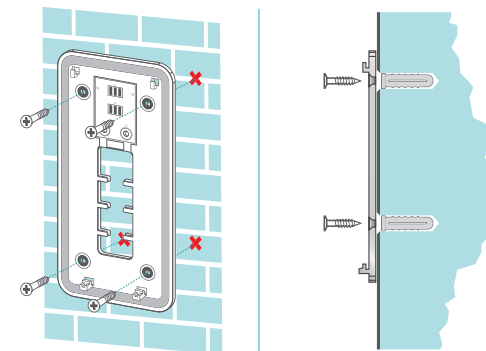

- 3 Place the device on the bracket.
- 4 Tighten the security screw.

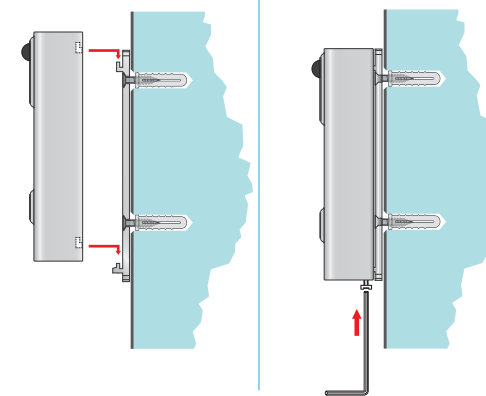

Specification

Video & Audio	
Image Sensor	1/4" CMOS OV9732
Resolution	720P
Effective Pixels	1280x720px
Frame Rate	1~25 FPS
Infrared LED	6 pcs IR LED, IR range: 6m
Lens	1.7mm/F2.0
Scene Angle	166°
Min. Illuminance	Color: 0.01 Lux; B&W: 0.001Lux
Image Setting	BLC, Infrared, HLC, Motion Compensation, WDR
Audio	Two-way audio intercomm with noise cancellation
Storage	
Storage Type	Micro SD Card (Max 32G)
Video Length	15s / 30s / 45s Settable
Recording	Triggered by push button, or PIR motion sensor
Network	
Wifi Frequency	2.4GHz
Standards	IEEE 802.11 b/g/n
Live View Speed	within 3 ~ 4 Sec
APP	
App Name	Smart Life
OS	iOS, Android
Remote View	Within 2 sec
Notification	Notification push within 2 sec
Others	
Working Temp. & Humidity	-20°C ~ 50°C; <90% (No condensation)
Power	18650 Battery x 2, or by hardwre power 8V~24V AC
Standby Current	170µA
Working Current	200mA
Standby Time	6 ~ 8 Months
Working Time	4 ~ 6 Months (10 times wake up per day)
Battery	Rechargeable 18650 Battery
Device Sharing	upto 5 users, (support 3 users liveview simultaneously)
Size (mm)	67 × 38 × 136
Weight (g)	300

Warranty Against Defects

Laser Corporation Pty Ltd ("Laser") warrants your new product to be free from defects in materials and workmanship for 12 months, from the date of purchase, provided that the product is used in accordance with accompanying recommendations or instructions where provided. The benefit of this warranty is in addition to your rights under the Australian Consumer Law and to other rights and remedies of the consumer under a law in relation to the goods or services to which the warranty relates. Through a network of retailers and resellers, Laser will provide you with your choice of a repair, exchange (where possible) or refund (within Dead on Arrival period) for this product if it becomes defective within the warranty period. This warranty will no longer apply where the defect is a result of alteration, accident, misuse, abuse, normal wear and tear, neglect or improper storage. Please retain your receipt as proof of purchase. How to make a product warranty claim:

Step 1: Find your receipt which proves the date of purchase. Where the date of purchase cannot be verified, your place of purchase or Laser will make an assessment based on the date of manufacture, the condition of the Laser product and the type of defect.

Step 2a): Contact your place of purchase. They will assess the nature of the fault and repair, replace or refund the product as per their store refund or warranty policy.

Step 2b): If your place of purchase cannot be contacted, then you can contact Laser Customer Service with details of your defective Laser Product Phone (02) 9870 3388; or Email: service@laserco.com.au or online www.laserco.com.au/warranty (click on "Consumers (End Users)"). Our business address is: Unit 1/6-8 Byfield Street, North Ryde, NSW 2113

Step 3: Laser will issue you with a Return Authorisation (RA) number within 48 hours. When requested, send us the defective product and a copy of your receipt. Laser will cover the cost of the return delivery.

Step 4: Wait for us to contact you. Once we have received your defective Laser product for inspection, we will inform you of our assessment of your claim within 7 days. When we contact you, we will firstly let you know whether you have a valid claim under this Warranty, and if so, we will inform you whether your defective Laser product will be replaced or repaired, together with the number of days you can expect to wait to receive your replaced or repaired Laser product.

Step 5: For further details on warranty cover and returns, please check Terms and Conditions for Warranty Returns section at www.laserco.com.au/warranty (Consumers Section).

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.