




User Manual

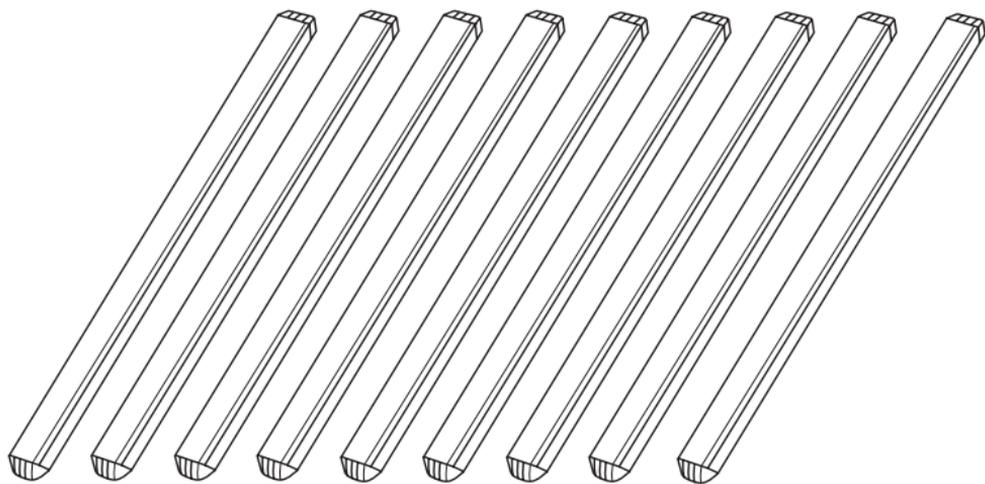

AmbiColour Smart Light Bars
CSH-9BAR-262

WHAT'S IN THE BOX


- Smart bar light x 9
- Connector switch
- Connector x 8
- Double-sided adhesive sticker x 9
- AC adaptor
- User manual

What you will need:

- Smartphone or tablet with Bluetooth and connected to 2.4GHz band Wi-Fi network
- Password for the Wi-Fi network

OVERVIEW

Controller Switch

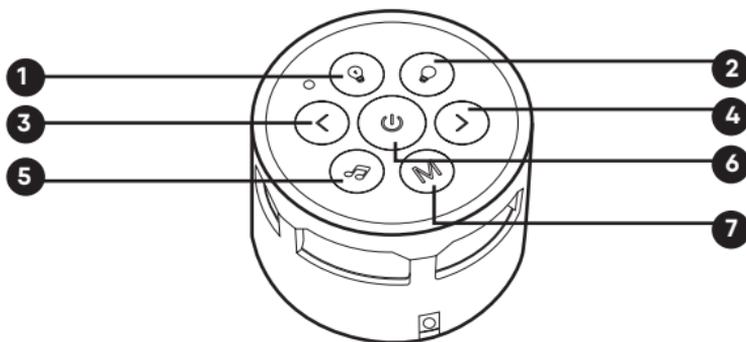


1. Switch to color light	2. Switch to white light	3. Press it to turn down the luminance of light
4. Press it to turn up the luminance of light	5. Press it to enter music sync mode	6. Power button: Press to turn on/off light, long press to enter configuration mode
7. Press it to enter or switch over the scene mode		

INSTALLATION

! INDOOR USE ONLY

• We recommend that you create your design in another location (like on a table,) before you bring it to the wall.

1. Stick adhesive tapes to the bottom of connectors by peeling off one side.

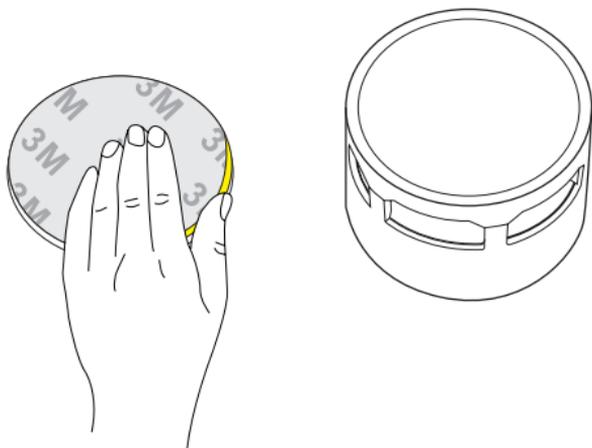


INSTALLATION

continued...

2. Create your design.


Two splicing methods support:

- Insert the light strip from the side.
- Open the cover of the connector and insert the light strip from the front.

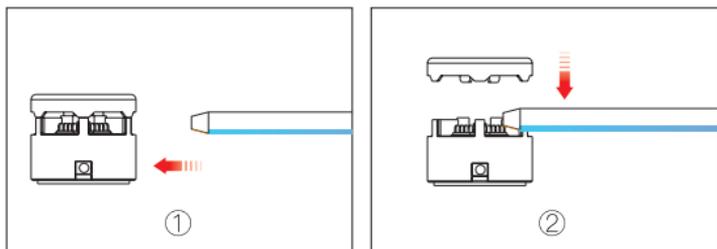

3. Create your design.


! Make sure to attach on smooth, dry surfaces and not on uneven or wet surfaces

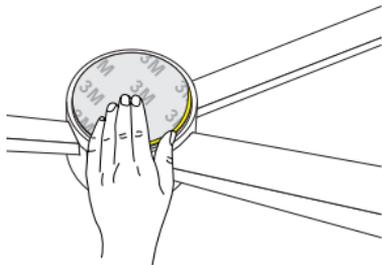

INSTALLATION

continued...


4. Connect the power adaptor to the connector switch. Then, plug in the power adaptor.

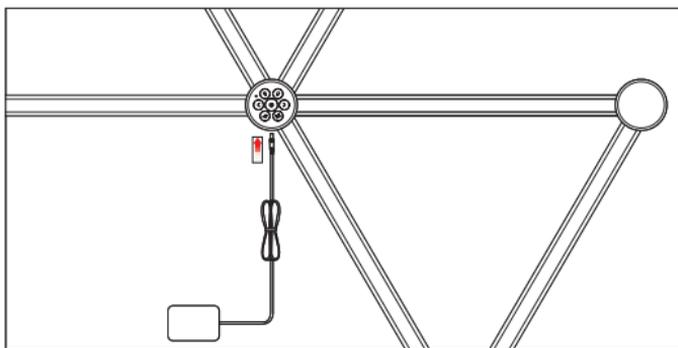


5. Press the Power button on the controller to turn on the lights.

CONNECT WITH THE APP

1. Get the app.

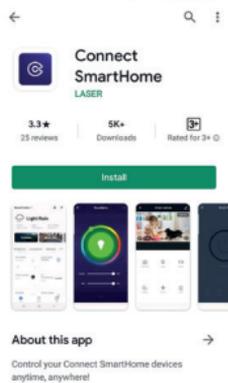


2. Register or login to app.

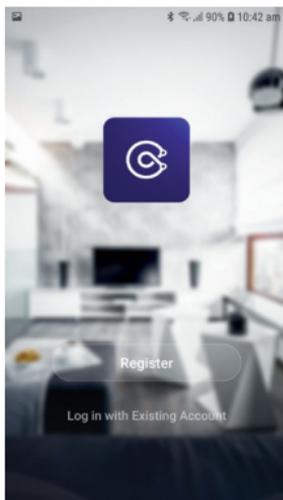


CONNECT WITH THE APP

continued...

3. Recommended app settings.

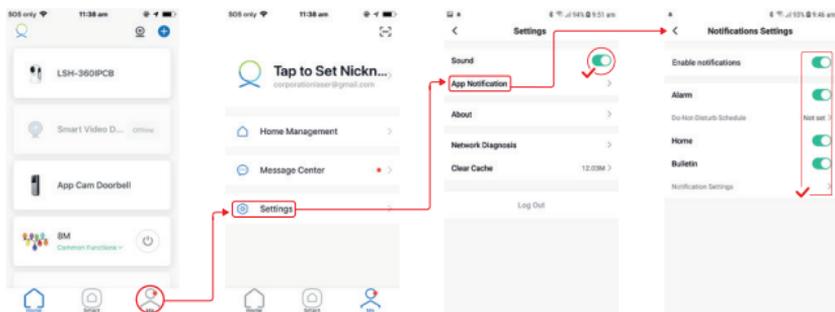

4. Turn on Bluetooth and Wi-Fi on your smartphone. Make sure you are connected to a 2.4GHz Wi-Fi access point.

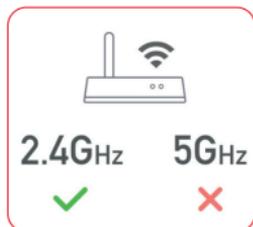

Only 2.4G Wi-Fi
networks are supported


CONNECT WITH THE APP

continued...


5. Connecting lights to app.

TIP

If light not flashing, hold down power button until light blinks rapidly to enter pairing mode.



Choose Wi-Fi and enter password







Reset the device



Power on the light and confirm that the light has already flashed or breathed.

Confirm the light has flashed or breathed.

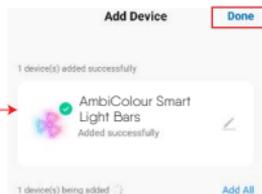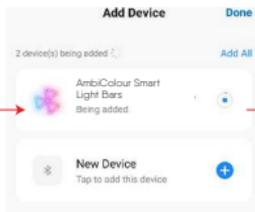


TIP
When connected, the light will stop blinking and stay lit.

CONNECT WITH THE APP

continued...


6. Controlling lights with the app.

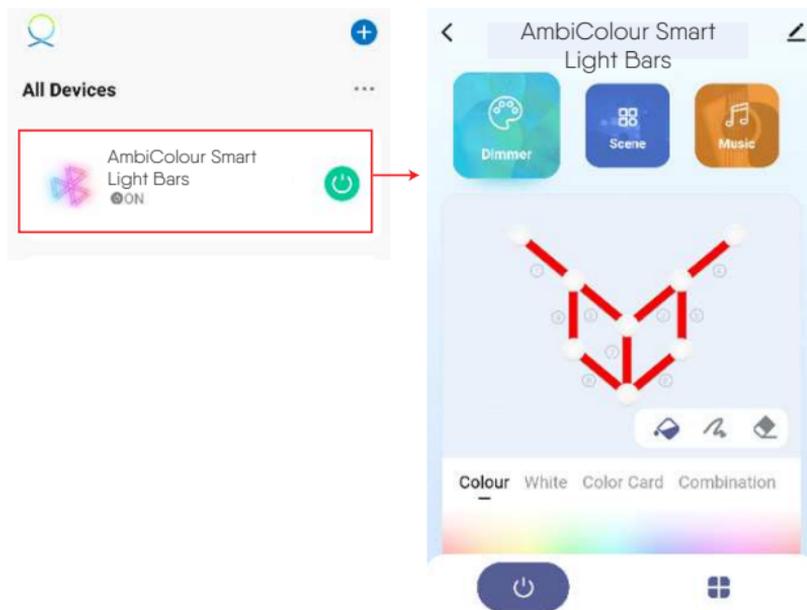

CONNECT WITH THE APP

continued...

7. Removing light strip from the app.

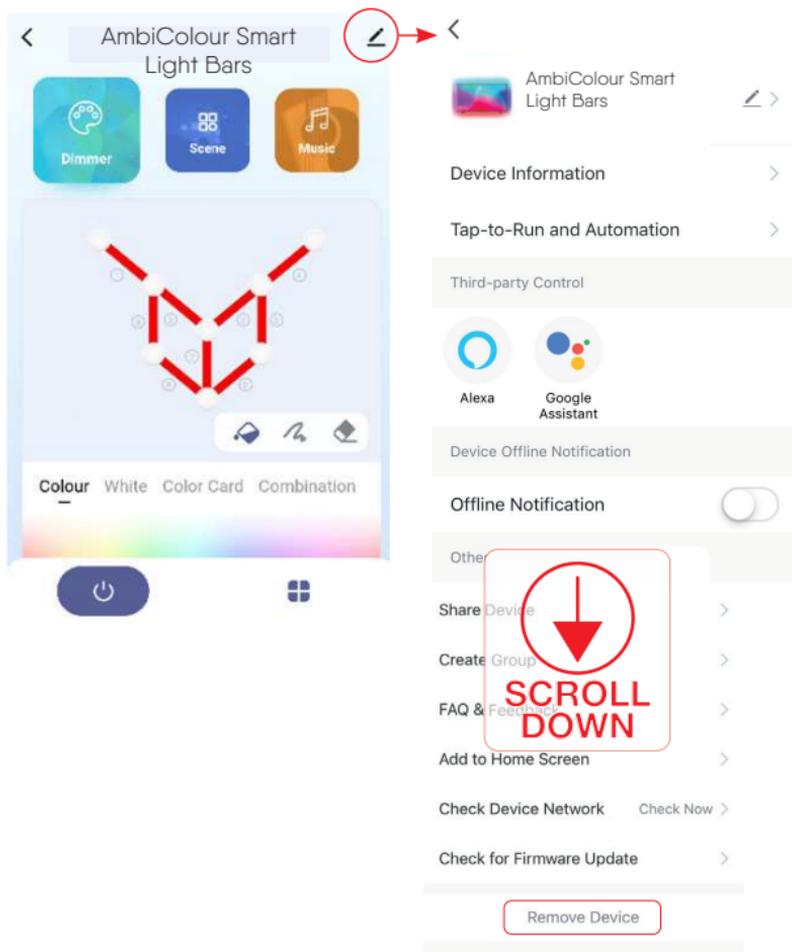

TROUBLESHOOTING

THE SMART LIGHT BARS DO NOT APPEAR ON THE APP:

- If the controller's light is not blinking rapidly, hold down the power button until the light flashes rapidly to reset it.
- Enable Bluetooth and Wi-Fi are enabled on your smartphone.
- Ensure that the Wi-Fi signal is strong where it is being installed. If not move the lights closer to the Wi-Fi access point temporarily.
- Make sure you are connected to a 2.4GHz Wi-Fi network.

Most modems/routers support both 2.4GHz and 5GHz bands and may use the same Wi-Fi network name (SSID) for both bands. Log into the router's settings and check:

- Is 2.4GHz band enabled?

TROUBLESHOOTING

continued...

- If both 2.4GHz and 5GHz bands are using the same SSID, find the settings that allow you to separate the 2.4GHz and 5GHz bands. Usually, there will be an option to configure each band individually. Change the SSID for one or both bands to make them distinct. For instance, “NetworkName_2.4GHz” and “NetworkName_5GHz”.
- If you are using Telstra Smart Modem, refer to the following guide to resolve band steering issues: <https://www.laserco.com.au/Telstra-NBN-Gen-Smart-Modem-Fix>

WARNINGS AND CAUTIONS

1. For indoor use only.
2. This panel is best used on smooth, dry surfaces and should not be applied to uneven or wet surfaces.
3. Ensure the surface is completely dry before applying the light panel.
4. Gently press the central point of the connector against the wall for 30 seconds to maximize the addition.
5. Avoid installing the object above heat sources in areas where direct sunlight, air flow, and temperature changes significantly.
6. Don't leave the power cord on the floor to prevent tripping.
7. Children must be supervised by an adult when using this product.

SPECIFICATIONS

Dimensions - 1x bar light (LxWxH)	270x16x10 mm
Power adaptor	input: AC 100-240V 50/60Hz output: 12V 2A (max.)
Wi-Fi Standard	802.11 b/g/n
Wi-Fi Frequency:	2.4GHz
Wi-Fi Standard	802.11 b/g/n
Bluetooth	5.1

Visit our website

www.connectsmarthome.com.au



Check us out at

