



Product Features

1. Plug & Play, easy to install and use.
2. 5 Levels Volume Control, max volume: 110 decibels.
3. 55 Ringtones, with LED indicator.
4. 650ft/200m Wireless Working Range in Open Area.
5. No batteries, small in size, low power consumption.
6. Wireless connection with video doorbells; Support "one-to-many" and "many-to-one" pairing.

Product Drawing



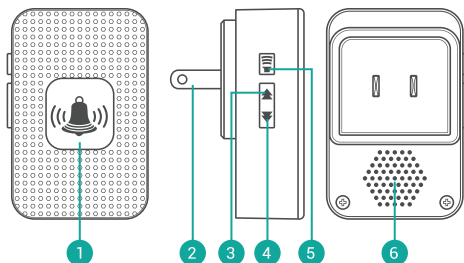

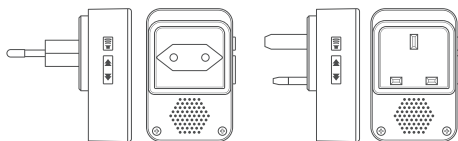1. LED Indicator
2. Power plug (US)
3. Previous Ringtone
4. Next Ringtone
5. Volume Control Button
6. Speakers



Chime with Euro Plug


Chime with UK Plug

First Time Using

1. Plug the chime into an outlet. The default ringtone "Ding-dong" will be played at volume level 5, with the LED indicator blinking.
2. Short press on volume button  to adjust volume.
Level 1: mute (only the indicator flashes).
Level 2 ~ 5: the volume gradually increases.
3. Ringtone selection:
Press on "previous / next button"  to select ringtone.
Press and hold "volume control" for 5 sec to use the selected ringtone.

Device Pairing

1. Select your favorite ringtone, press and hold volume control button for 5 seconds till you heard a "ding" sound. The chime will be in pairing mode for 8 seconds.
2. Press the call button 1~2 times on a video doorbell nearby, and a "ding-ding" alert sound will be heard from the chime. Pairing succeeds.
Note: The chimes and doorbells support "one-to-many" & "many-to-one" pairing.
3. Press again the call button on video doorbell, and the indoor chime will alert with the selected ringtone, LED indicator blinking.

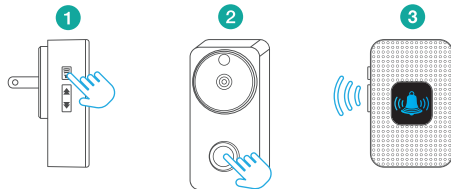

Clear Connection

1. Press & hold the next button for 5 seconds till you hear a "ding".
2. The indoor chime will be restored to factory default.


Technical Details

Specification	
Speaker	5 levels volume control
Mute	Support
Ringtone	55 ringtones
Max Volume	110 dB
Power Type	AC power plug
Input Voltage	110V~260V AC (50~60Hz)
Consumption	0.2 W
Frequency	433.92MHz \pm 280KHz
Range	650ft / 200m (in open area)
Ingress Protection	IP 55, Indoor use
Working Temp.	-30 C ~ 70 C;
Humidity	<90% (No condensation)
Size (mm)	71×46×28 (Not including plug)
Weight (g)	78



Wireless[®] Doorbell Chime

Plug and Play · with LED Indicator

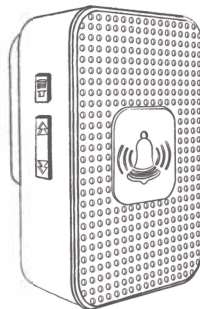

- ◆ Thanks for purchasing and using our product. Please read this quick start guide before using, and keep it for future reference.
- ◆ Menu contents are subject to change without notice in accordance with our policy of continuous product improvement.